




Becatech

Interconnective Power

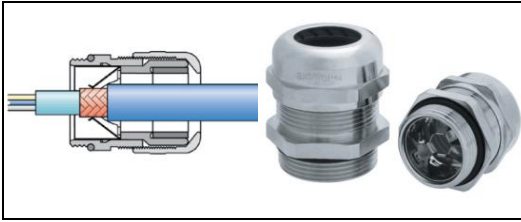

EMC gland (EMC wartel)

Technical Specification :

Body: nickel-plated brass.
Insert: polyamide.
Seal: CR.
O-ring: NBR.
Rated temperature dynamic: -25°C to 100°C.
Rated temperature static: -40°C to 100°C.

Application :

For EMC-compliant grounding of copper braid.
Telecommunications.
Machine construction and installation.
Measurement and control technology.
Automation.

Article	Overall Diameter From – to mm	Minimum Diameter Over braiding mm	SW Wrench Size mm	Thread Length D mm
M12 x 1.5	3.5 – 7.0	1.0	16.0	6.5
M16 x 1.5	4.5 – 10.0	4.0	20.0	7.0
M20 x 1.5	7.0 – 13.0	5.0	24.0	8.0
M25 x 1.5	9.0 – 17.0	7.5	29.0	8.0
M32 x 1.5	11.0 – 21.0	9.0	36.0	9.0
M40 x 1.5	19.0 – 28.0	15.0	45.0	9.0
M50 x 1.5	27.0 – 35.0	21.0	54.0	10.0

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079