

Becatech

Interconnective Power



**Insulated cable lug
(Geïsoleerde kabelschoen)**


Technical Specification :

Material: galvanic tinned copper.
Insulation: PC halogen free.
Temperature resistance up to 120°C.

Application :

For fine and extra fine core conductors.

Drawing :

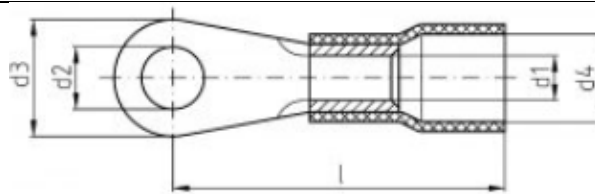

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079



Becatech


Interconnective Power

Intersection mm ²	Hole Size	Color	Dimension					Weight (kg/100)
			d1	d4	d2	d3	l	
0.1-0.5	2	Yellow	1.0	2.3	2.2	5.0	14.0	0.02
	3		1.0	2.3	3.2	5.0	14.0	0.02
	4		1.0	2.3	4.3	6.5	16.0	0.03
	5		1.0	2.3	5.3	8.0	16.0	0.03
0.5-1	2	Red	1.6	4.0	2.2	6.0	17.0	0.06
	3		1.6	4.0	3.2	6.0	17.0	0.06
	3.5		1.6	4.0	3.7	6.0	17.0	0.06
	4		1.6	4.0	4.3	8.0	18.0	0.07
	4		1.6	4.0	4.3	7.0	17.5	0.06
	4		1.6	4.0	4.3	8.0	18.0	0.07
	5		1.6	4.0	5.3	10.0	19.0	0.08
	5		1.6	4.0	5.3	8.0	18.5	0.06
	5		1.6	4.0	5.3	10.0	19.0	0.08
	6		1.6	4.0	6.5	10.0	19.0	0.08
	8		1.6	4.0	8.4	14.0	23.0	0.10
	10		1.6	4.0	10.5	18.0	25.0	0.10
1.5-2.5	3	Blue	2.3	4.4	3.2	6.0	17.0	0.07
	3.5		2.3	4.4	3.7	6.0	17.0	0.06
	4		2.3	4.4	4.3	8.0	18.0	0.08
	4		2.3	4.4	4.3	6.8	17.6	0.06
	4		2.3	4.4	4.3	8.0	18.0	0.08
	5		2.3	4.4	5.3	10.0	20.0	0.10
	5		2.3	4.4	5.3	8.0	19.5	0.07
	5		2.3	4.4	5.3	10.0	20.0	0.10
	6		2.3	4.4	6.5	11.0	22.0	0.11
	6		2.3	4.4	6.5	11.0	22.0	0.11
	8		2.3	4.4	7.4	14.0	23.0	0.14
	10		2.3	4.4	10.5	18.0	25.6	0.19
4-6	12		2.3	4.4	13.0	18.0	26.0	0.16
	4	Yellow	3.6	6.4	4.3	8.0	21.0	0.14
	5		3.6	6.4	5.3	10.0	22.0	0.16
	6		3.6	6.4	6.5	11.0	23.0	0.17
	6		3.6	6.4	6.5	11.0	23.0	0.17
	8		3.6	6.4	8.4	14.0	26.0	0.22
	10		3.6	6.4	10.5	18.0	28.0	0.27
10	12		3.6	6.4	13.0	18.0	28.0	0.24
	5	Red	4.5	8.0	5.3	10.0	24.5	0.23

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079



Becatech

Interconnective Power

	6		4.5	8.0	6.5	11.0	25.5	0.24
	8		4.5	8.0	8.4	14.0	28.5	0.30
	10		4.5	8.0	10.5	18.0	29.5	0.35
16	5	Blue	5.8	10.5	5.3	11.0	31.5	0.40
	6		5.8	10.5	6.5	11.0	31.5	0.38
	8		5.8	10.5	8.4	14.0	33.5	0.43
	10		5.8	10.5	10.5	18.0	35.5	0.50
25	5	Yellow	7.5	13.0	5.3	12.0	38.0	0.71
	6		7.5	13.0	6.5	12.0	38.0	0.69
	8		7.5	13.0	8.4	16.0	38.0	0.76
	10		7.5	13.0	10.5	18.0	39.0	0.79
	12		7.5	13.0	13.0	22.0	44.0	0.97
35	6	Red	9.0	14.5	6.5	15.0	41.0	0.97
	8		9.0	14.5	8.4	16.0	41.0	0.97
	10		9.0	14.5	10.5	18.0	42.0	1.01
	12		9.0	14.5	13.0	22.0	46.0	1.17
50	6	Blue	11.0	16.5	6.5	18.0	47.5	1.76
	8		11.0	16.5	8.4	18.0	47.5	1.71
	10		11.0	16.5	10.5	18.0	47.5	1.74
	12		11.0	16.5	13.0	22.0	49.5	1.80
70	6	Yellow	13.0	18.7	6.5	22.0	51.0	2.58
	8		13.0	18.7	8.4	22.0	51.0	2.63
	10		13.0	18.7	10.5	22.0	51.0	2.55
	12		13.0	18.7	13.0	22.0	51.0	2.58
	16		13.0	18.7	17.0	28.0	55.0	2.68
95	8	Red	15.0	21.7	8.4	24.0	57.5	4.09
	10		15.0	21.7	10.5	24.0	57.5	4.22
	12		15.0	21.7	13.0	24.0	57.5	3.92
	16		15.0	21.7	17.0	28.0	59.5	3.94
120	8	Blue	16.5	24.2	8.4	24.0	62.0	5.63
	10		16.5	24.2	10.5	24.0	62.0	5.56
	12		16.5	24.2	13.0	24.0	62.0	5.33
	16		16.5	24.2	17.0	28.0	66.0	5.67
150	10	Yellow	19.0	27.2	10.5	30.0	70.0	8.02
	12		19.0	27.2	13.0	30.0	70.0	7.84
	16		19.0	27.2	17.0	30.0	70.0	7.56

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079