


Becatech

Interconnective Power

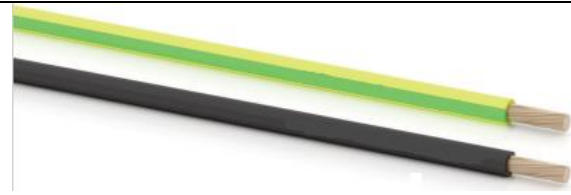

Halogen free wire (H07Z1-K)

Cable Structure :

Conductor : flexible bare or tinned copper (class 5).
Insulation: halogen free polymer compound.

Technical Specification :

Rated temperature operation: -25°C to 70°C.

Rated temperature laying: -5°C to 50°C.

Rated bending radius: 4 x ϕ .

Fire behaviour:

- Halogen free according to IEC 60754-2.
- Low smoke generation according to IEC 61034-2.
- Self-extinguishing according to IEC 60332-1-2.
- Fire retardant according to IEC 60332-3-24.
- Reaction to fire according to EN 50399 B2ca-s1a, d1, a1.

Application :


Suitable for internal wiring of appliances and panels.

Core x mm ²	Overall Diameter mm	Weight (kg/km)
1x1.5	2.9	20
1x2.5	3.6	31
1x4	4.1	45

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079

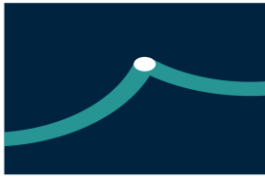

Becatech

Interconnective Power

1x6	4.7	65
1x10	6.1	111
1x16	7.2	170
1x25	8.9	262
1x35	10.2	363
1x50	12.0	487
1x70	13.6	687
1x95	15.6	914
1x120	17.3	1146
1x150	19.3	1444
1x185	21.5	1792
1x240	24.6	2359

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079