




Becatech

Interconnective Power

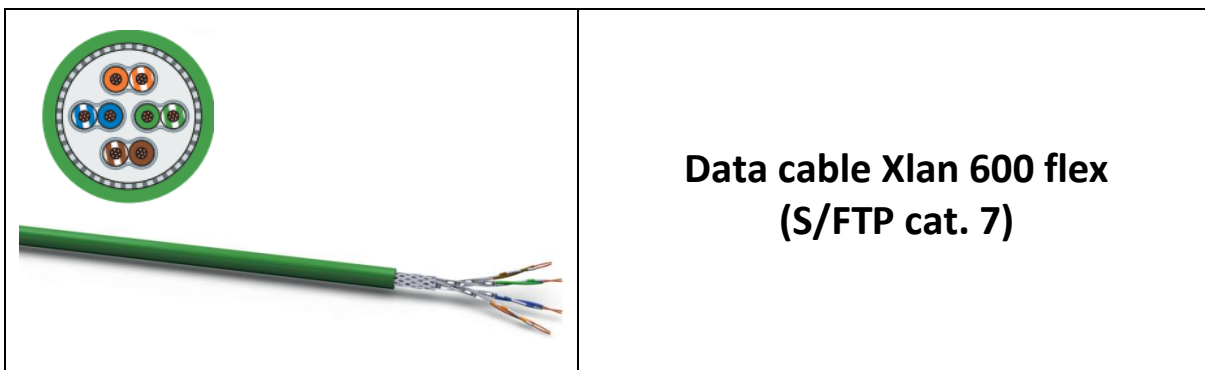

Cable Structure :

Conductor: tinned copper.
Insulation: SFS-PE.
Shielding pairs: plastic laminated aluminum foil.
Shielding: tinned copper wire braid.
Outer sheath: special PVC.

Technical Specification :

Rated temperature fixed: -20°C to 70°C.
Rated temperature during installation: -10°C to 50°C.
Rated bending radius moved: 10 x ϕ .
Rated bending radius installed: 5 x ϕ .
Flame resistance according to EN 60332-1.

Application :

Data cable for analogue and digital signal transmission in industrial environments in the frequency range up to 1000 MHz.
Suitable for applications up to class F (600MHz).

Dimension	Overall Diameter mm	Cu Weight (kg/km)	Cable Weight (kg/km)
AWG26/7	6.3	25.0	50.0

Becatech B.V.
Middenweg 18
3930 Hamont-Achel

info@becatech.be
www.becatech.be
+32 (0)11 19 29 45

IBAN BE89363217265185
VAT BE0777.903.079
CoC 0777.903.079